
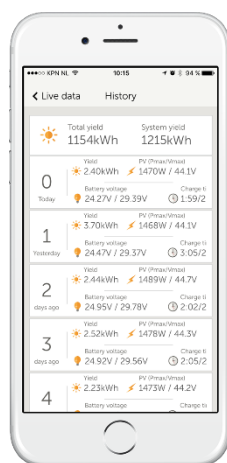


# SmartSolar Charge Controllers MPPT 100/30 & 100/50

www.victronenergy.com

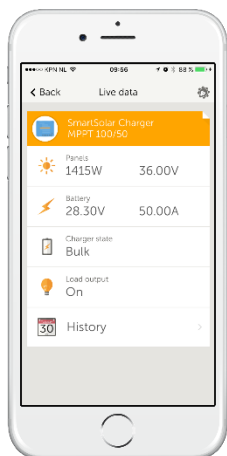

## Bluetooth Smart built-in: dongle not needed

The wireless solution to set-up, monitor and update the controller using Apple and Android smartphones, tablets or other devices.

## VE.Direct

For a wired data connection to a Color Control panel, PC or other devices

## Ultrafast Maximum Power Point Tracking (MPPT)

Especially in case of a clouded sky, when light intensity is changing continuously, an ultra-fast MPPT controller will improve energy harvest by up to 30% compared to PWM charge controllers and by up to 10% compared to slower MPPT controllers.

## Advanced Maximum Power Point Detection in case of partial shading conditions

If partial shading occurs, two or more maximum power points may be present on the power-voltage curve.

Conventional MPPTs tend to lock to a local MPP, which may not be the optimum MPP.

The innovative BlueSolar algorithm will always maximize energy harvest by locking to the optimum MPP.

## Outstanding conversion efficiency

No cooling fan. Maximum efficiency exceeds 98%.

The full output current up to 40°C (104°F).

## Flexible charge algorithm

Fully programmable charge algorithm (see the software page on our website), and eight pre-programmed algorithms, selectable with a rotary switch (see manual for details).

## Extensive electronic protection

Over-temperature protection and power derating when temperature is high.

PV short circuit and PV reverse polarity protection.

PV reverse current protection.

## Internal temperature sensor

Compensates absorption and float charge voltage for temperature.

## Real-time data display options

- Apple and Android smartphones, tablets and other devices.

- Color Control panel.



SmartSolar Charge Controller  
MPPT 100/50

| SmartSolar Charge Controller   | MPPT 100/30   | MPPT 100/50 |
|--|---|-------------|
| Battery voltage  | 12/24V Auto Select  |             |
| Rated charge current   | 30A   | 50A         |
| Nominal PV power, 12V 1a,b)  | 440W  | 700W        |
| Nominal PV power, 24V 1a,b)  | 880W  | 1400W       |
| Maximum PV open circuit voltage  | 100V  | 100V        |
| Max. PV short circuit current 2)   | 35A   | 60A         |
| Maximum efficiency   | 98%   | 98%         |
| Self-consumption   | 10 mA   |             |
| Charge voltage 'absorption'  | Default setting: 14,4V / 28,8V (adjustable)   |             |
| Charge voltage 'float'   | Default setting: 13,8V / 27,6V (adjustable)   |             |
| Charge algorithm   | multi-stage adaptive  |             |
| Temperature compensation   | -16 mV / °C resp. -32 mV / °C   |             |
| Protection   | Battery reverse polarity (fuse, not user accessible)<br>PV reverse polarity<br>Output short circuit<br>Over temperature |             |
| Operating temperature  | -30 to +60°C (full rated output up to 40°C)   |             |
| Humidity   | 95%, non-condensing   |             |
| Data communication port  | VE.Direct<br>See the data communication white paper on our website  |             |
| <b>ENCLOSURE</b>   |   |             |
| Colour   | Blue (RAL 5012)   |             |
| Power terminals  | 13 mm <sup>2</sup> / AWG6   |             |
| Protection category  | IP43 (electronic components), IP22 (connection area)  |             |
| Weight   | 1,3 kg  |             |
| Dimensions (h x w x d)   | 130 x 186 x 70 mm   |             |
| <b>STANDARDS</b>   |   |             |
| Safety   | EN/IEC 62109-1  |             |
| 1a) If more PV power is connected, the controller will limit input power.  |   |             |
| 1b) The PV voltage must exceed Vbat + 5V for the controller to start.<br>Thereafter the minimum PV voltage is Vbat + 1V. |   |             |
| 2) A higher short circuit current may damage the controller in case of reverse polarity connection of the PV array.      |   |             |