

General Specifications

Product	: Phone Charger
Product description	: 12 VDC Universal Phone Charger for Ulitum series
Product name	: Universal Phone Charger

Electrical Specifications

Nominal Voltage input	: 12 VDC
Nominal Voltage Output	: 6 VDC
Maximum Current Output	: 550 mA
Electrical Efficiency	: 85%
Ambient temperature allowed	:
Operating Temperature	: -10°C to +55°C
Storage Temperature	: -40°C to +85°C


Protection Specifications

Reverse Polarity Protection	: Yes
Over Load Protection	: Yes
Short Circuit Protection	: Yes
Enclosure protection class	: IP 22

Mechanical Specifications

Materials	: ABS (fire retardant)
Standard cable	: - Sundaya Extention cord cable
Standard cable length	: - 1.0 meter (input cable) - 1.5 meter (output cable)
Input Connector	: - Sundaya Ulitum plug for Ulitum application
Output Connector	: - Nokia phone charger plug for Output 6 VDC
Optional Connector Adapter	: - Nokia series 6100 / 6650 / 6800 - Sony Ericson T28 - Sony Ericson K750 - Motorola 328 - Motorola V3 - Samsung A288 - Samsung M300
Color	: Black
Product dimensions (LxWxH)	: 86 x 24 x 24 mm
Net product weight	: 0.095 kg

Mechanical Product Drawing

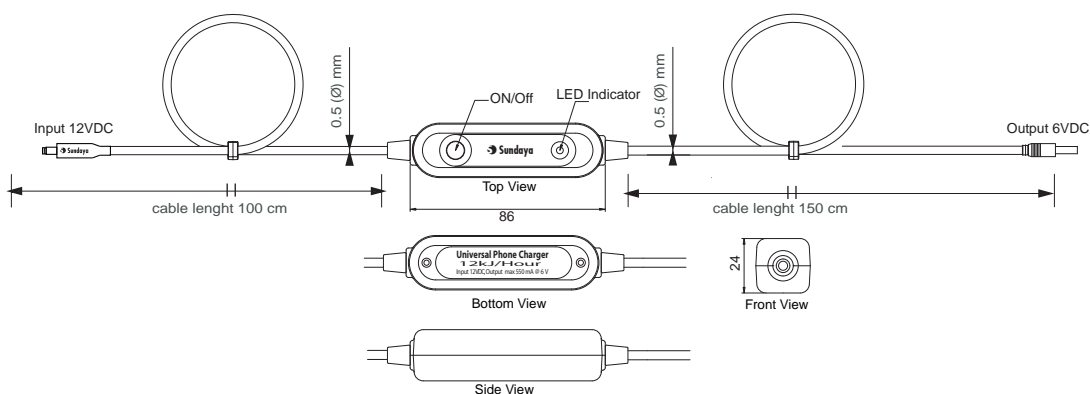

Connector Adapter



Because of continuous research and development of our products the information and specifications in this data sheet are subject to change without prior notice.