Universal Phone Charger for Ulitum series

**Specifications sheet**

## General Specifications

| | | |
|---|---|---|
| Product | : | Phone Charger |
| Product description | : | 12 VDC Universal Phone Charger for Ulitium series |
| Product name | : | **Universal Phone Charger** |

## Electrical Specifications

| | | |
|---|---|---|
| Nominal Voltage input | : | 12 VDC |
| Nominal Voltage Output | : | 6 VDC |
| Maximum Current Output | : | 550 mA |
| Electrical Efficiency | : | 85% |
| Ambient temperature allowed | : | |
| Operating Temperature | : | -10°C to +55°C |
| Storage Temperature | : | -40°C to +85°C |

## Protection Specifications

| | | |
|---|---|---|
| Reverse Polarity Protection | : | Yes |
| Over Load Protection | : | Yes |
| Short Circuit Protection | : | Yes |
| Enclosure protection class | : | IP 22 |

## Mechanical Specifications

| | | |
|---|---|---|
| Materials | : | ABS (fire retardant) |
| Standard cable | : | - Sundaya Extention cord cable |
| Standard cable length | : | - 1.0 meter (input cable)<br>- 1.5 meter (output cable) |
| Input Connector | : | - Sundaya Ulitium plug for Ulitium application |
| Output Connector | : | - Nokia phone charger plug for Output 6 VDC |
| Optional Connector Adapter | : | - Nokia series 6100 / 6650 / 6800<br>- Sony Ericson T28<br>- Sony Ericson K750<br>- Motorola 328<br>- Motorola V3<br>- Samsung A288<br>- Samsung M300 |
| Color | : | Black |
| Product dimensions (LxWxH) | : | 86 x 24 x 24 mm |
| Net product weight | : | 0.095 kg |

### Mechanical Product Drawing

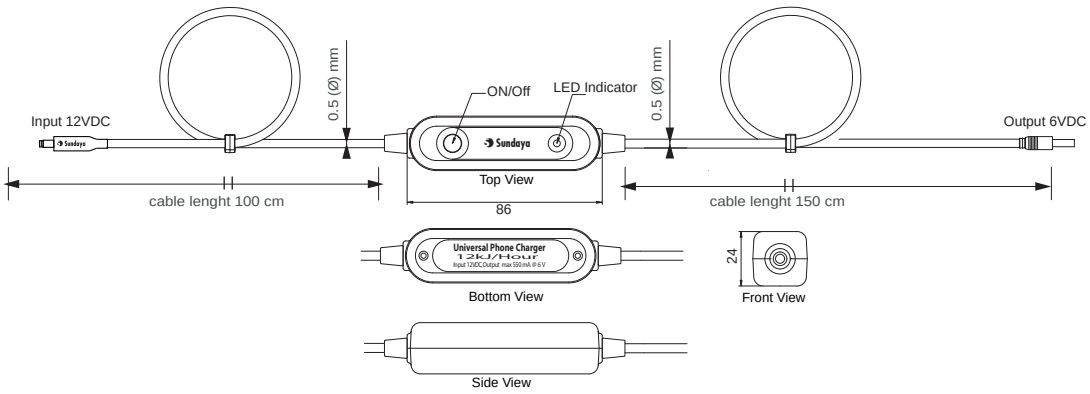


### Connector Adapter

*Because of continuous research and development of our products the information and specifications in this data sheet are subject to change without prior notice.*

Sundaya