

MOREPOWER

+Ve Positive Tolerance

CNPV's positive tolerance on label rating power provides higher kWh for money invested.

ARC Glass

Low iron, anti reflective coated glass gives 2% Energy gain.

Cell Matching

Matching gives 2% additional power gain measured at STC conditions.

Independent Performance Verification

Independently verified by Photon and Öko-Test as amongst the best kWh/kWp output worldwide.

100% Electro Luminescence

EL screening provides defect free modules.

Unique Frame


Twist resistant frame design.

International Bankability

Pre-approved with financial institutions and rapid capability ensures customers' cost of project is reduced.

**ISO9001
ISO14001
OHSAS18001**

Audited controls for high value consistency.

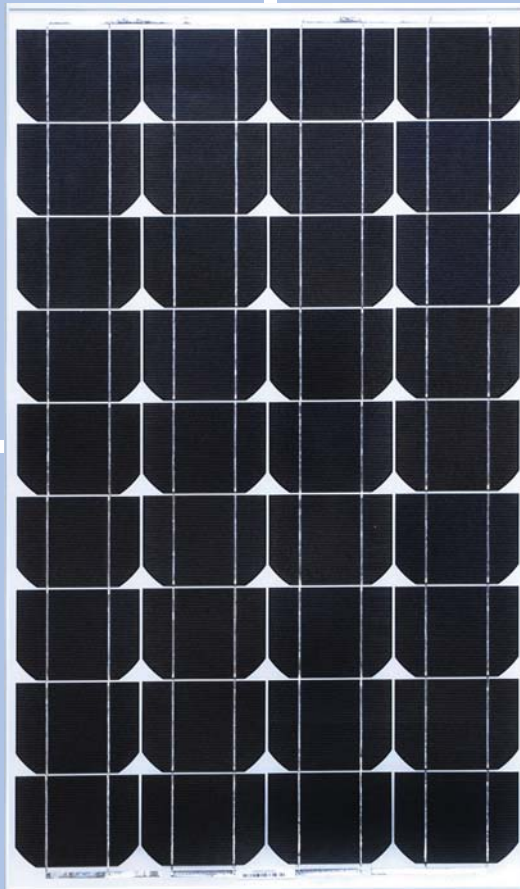

FOR LONGER

Performance Warranty 20 years

Designed to deliver more for longer.

Workmanship Warranty 5 years

Quality locked in at manufacturing.

Strength 5400Pa

Industry leading snow loading capacity.

Accredited ammonia/salt mist resistance

Long life in marine and high pollution environments.

Low Carbon Footprint

One of the lowest carbon footprints over 100 years life cycle.

Green Credentials

Fully committed to recycling during production and end of product life, a dedicated member of PV cycle.

Eco Friendly Packaging

Friendly materials choice with high density packing.

ISO14001 accredited ISO

Continuous improvement in reducing environmental impact.

MUCH SAFER

AND GREENER

About CNPV

CNPV Solar Power SA, is a leading integrated manufacturer of solar photovoltaic products, that designs, manufactures and supplies highly efficient and cost effective crystalline solar photovoltaic modules. Reliability & longevity are built into our world-class crystalline solar photovoltaic modules, which undergo rigorous internal tests and external certifications (IEC61215, IEC61730, UL, and CE) to ensure peak performance and safety. For further information, please visit CNPV's website at <http://www.cnpv-power.com>, please contact us at marketing@cnpv-power.com.



ISO9001
ISO14001
OHSAS18001



Electrical Data		CNPV-65M
Peak Power Watts-Pmax(Wp)		65
Maximum Power Voltage-Vmp(V)		18.6
Maximum Power Current-Imp(A)		3.50
Open Circuit Voltage-Voc(V)		22.5
Short Circuit Current-Isc(A)		3.75
Encapsulated Solar Cell Efficiency-ηc(%)		15.5
Module Efficiency-ηm(%)		13.1
Values at Standard Test Conditions STC (Air Mass AM 1.5, Irradiance 1000W/m ² , Cell Temperature 25°C)		

Mechanical Data	
Module Dimension	917×540×25mm(36.10"×21.26"×0.98")
Weight	7.0Kg(15.43lb)
Cells Configuration	36 cells (4×9)
Solar Cells	Mono Crystalline 93.75×125mm
Superstrate	High transmission tempered glass
Substrate	White polyester backsheet
Frame	Clear anodized aluminium alloy type 6063T5; Color:silver
J-box	TÜV certified with 2 schottky bypass diodes

Temperature Ratings	
Nominal Operating Cell Temperature (NOCT)	45°C(±2°C)
Temperature Coefficient of Pmax	-0.40%/°C
Temperature Coefficient of Voc	-0.30%/°C
Temperature Coefficient of Isc	0.05%/°C

Warranty	
5 years workmanship warranty	
20 years power performance warranty	



(Please refer to CNPV product warranty for details)

Maximum Ratings	
Operational Temperature	-40~+85°C
Maximum System Voltage	1000VDC
Maximum Series Fuse Rating	7A

Packaging Configuration	
Modules per carton	1 pcs
Modules per pallet	100 pcs
Modules per 40 ft high cubic container	2,400 pcs
Modules per 20 ft container	1,000 pcs
Dimensions of Pallet (L×W×H)	970×1130×147mm
Gross Weight	770kg




I-V Characteristics at Different Irradiance & Temperature

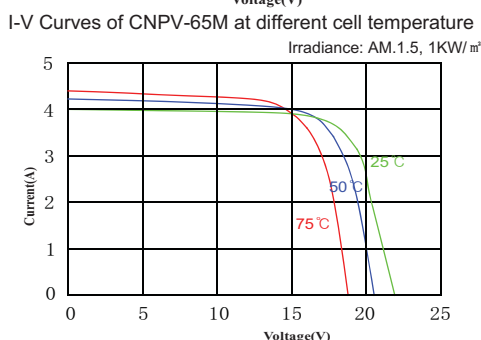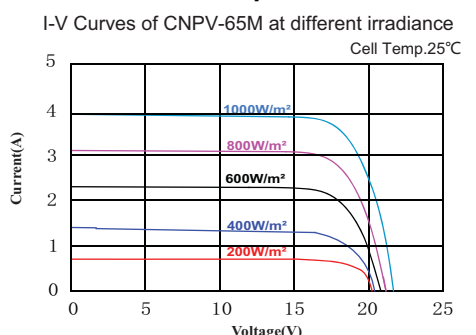

Module Efficiency Up to **13.1%** Wattage Up to **65W** Years Warranty **20**

Dimensional Characteristics

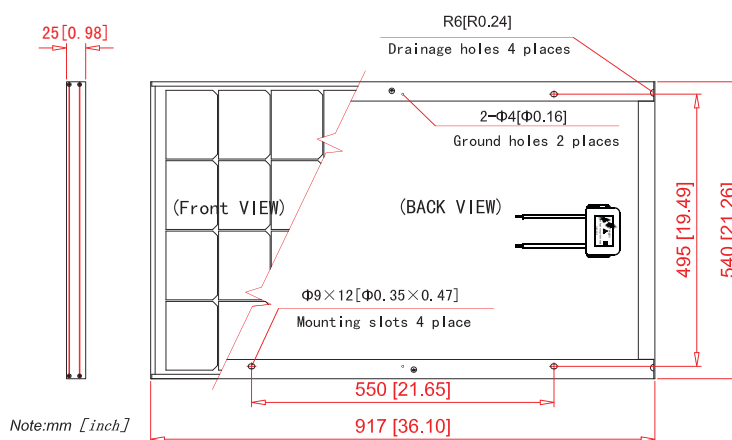

DISCLAIMER: specifications included in this datasheet are subject to change without previous notice from the company. In case of any conflicts/problems that may arise due to misinterpretation, prevailing conditions are the ones described in the original version (in English).

CNPV Dongying Solar Power Company Limited
 E-mail:marketing@cnpv-power.com
 Web:www.cnpv-power.com

